



OlifeEnergy DoubleBox is an all-metal heavy-duty charging station for charging of two electrical vehicles with AC and with a total output of up to 44 kW (22 kW each). It is intended for indoor and outdoor use, with an option of being installed on the wall or a profile anchored in the ground (column). Upon customer's wish, DoubleBox can be equipped with a socket or a cable (Type 2 as well as Type 1), or with a special coiled cable.

Even in its basic version, the OlifeEnergy Doublebox is equipped with a wide spectrum of functionalities. The charging session can be started automatically, immediately after the vehicle is connected, or based on authorization with an RFID card or a mobile phone. Complete configuration is also done through a Smartphone app. The charger output can be set up within the range from 0 to 44 kW; the setup output is shared by the connected vehicles. The charging station can be connected to HDO, integrated into smart household, interconnected with battery storage, and integrated with other control systems. Through the external OlifeEnergy SmartMeter unit it is possible to dynamically control the charging station output to avoid circuit breaker release with high consumption, and charge from excesses of solar power or low tariff.

The Doublebox CLOUD extended version can communicate with a remote server (OlifeEnergy Cloud, OCPP) that provides input power control for several OlifeEnergy stations, remote diagnostics, authorization, and user management. Each DoubleBox CLOUD can be included in OlifeEnergy Net, a network of charging stations, and bring its owner an extra income for public EV charging.

Specification

| | | | |
|----------------------------------|--|--------------------------------|---------------|
| Output | 2x Typ 2 | | |
| Type of connection | Type B (according to EN 61851) | Type C (according to EN 61851) | |
| Type of output | sockets | cables | coiled cables |
| Output power* | 0-44 kW | | |
| Type of AC supply | AC 3 + N + PE 400V 50 Hz, TN-S / AC 3 + PEN 400V 50 Hz, TN-C | | |
| Max. supply cable cross section | 25 mm ² | | |
| Control | Local – automatic, RFID, smartphone app / remote – OlifeEnergy Cloud**, OCPP** | | |
| Overcurrent protection | 2x three-pole circuit breaker 32 A | | |
| Residual protection | 2x four-pole residual current device, type A + residual DC current detection pursuant to IEC 62955 | | |
| Maximum input current* | 0-63 A | | |
| Communication | Bluetooth, Modbus RTU (via RS-485), ADC 0-10 V, OlifeEnergy Cloud**, OCPP 1.6/2.0** | | |
| Data connection** | Ethernet**, USB (GSM, Wi-Fi)**, RS-485 | | |
| Input voltage | 3 × 400 V | | |
| IP class | IP54 | | |
| Operating temperature & humidity | from -25 °C to +40 °C / from 5 % to 95 % | | |
| Dimensions *** | 385 × 550 × 140 mm | 529 × 550 × 140 mm | |
| Netto weight (packaging +2 kg) | 18,5 kg | 23,5 kg | 26,0 kg |

* nastavitelný maximální výkon je omezen předřazeným jističem, ** pouze ve variantě CLOUD, *** bez kabelů, včetně kryty zásuvky a držáku kabelu


OlifeEnergy Cloud Services

A charging station with a functionality extended by an option to be connected to the OlifeEnergy Cloud service and OCPP server. The OlifeEnergy Cloud service provides remote diagnostics, access management, and registration of charging. It also makes it possible to operate a public charging station. Through OlifeEnergy Cloud, it is possible to dynamically control the output of several stations and to communicate with existing MaR systems.

| Comparison of versions | DOUBLEBOX | DOUBLEBOX CLOUD |
|--|------------|--------------------|
| Protection against circuit breaker release | • | • |
| Integration with Smart household | • | • |
| Charging at low tariff, from solar power excesses* | • | • |
| RFID authorization | • | • |
| Control and configuration through ModBus RTU (via RS 485) | • | • |
| Configuration through mobile phone (locally Bluetooth) | • | • |
| Static setup of output current (according to upstream circuit breaker) | • | • |
| External current control (ModBus RTU / ADC 0–10 V) | • | • |
| List of charging, remote access control, commercial charging | | • |
| Remote and mass configuration via web | | • |
| OlifeEnergy Cloud, OCPP | | • |
| Dynamical control of output according to other consumption* | 2 stations | unlimited stations |

* The output is controlled by an OlifeEnergy SmartMeter external module. We recommend to install 1x SmartMeter at one main circuit breaker.

Dimensions and schema

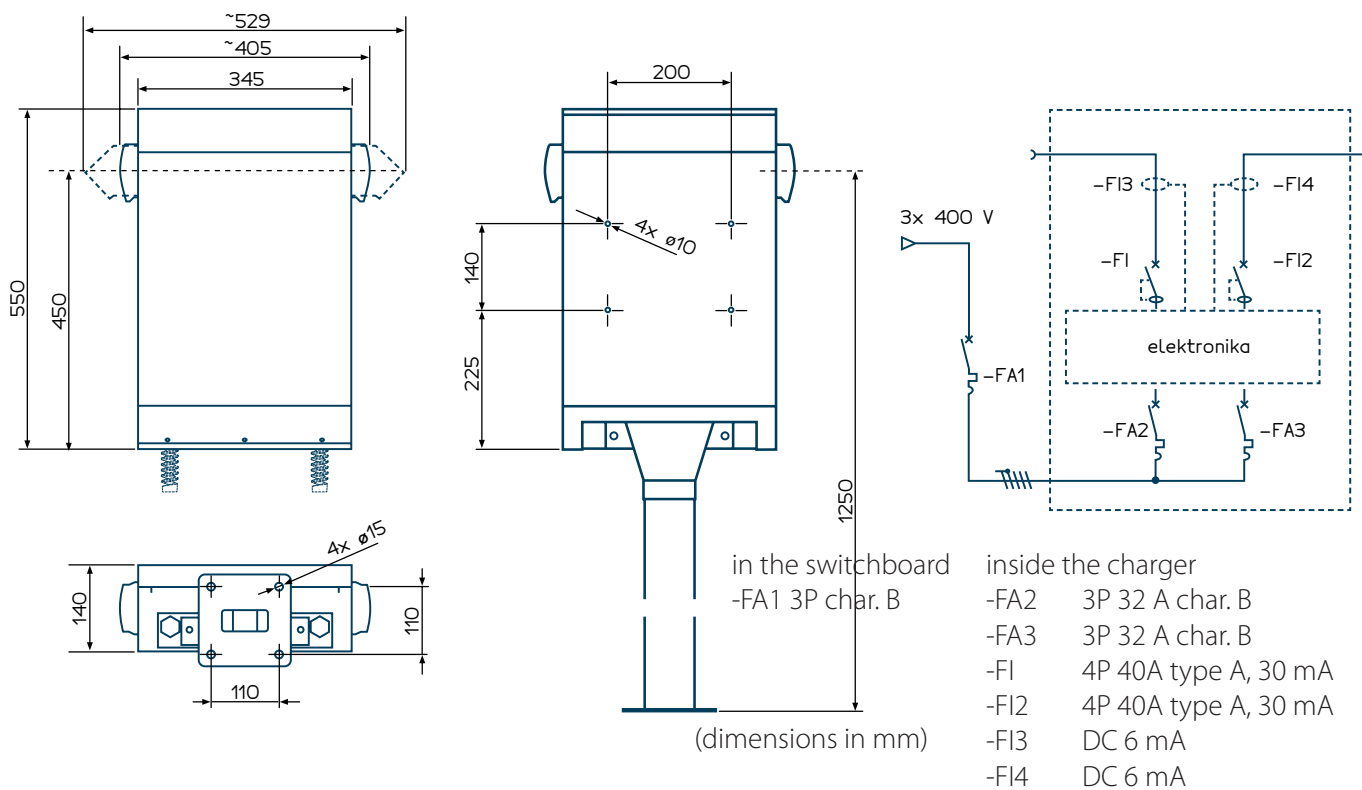

CZ: +420 556 621 030
INT: +420 556 621 020

CZ: obchod@sectron.cz
INT: sales@sectron.cz

SECTRON s.r.o.
Josefa Šavla 12, 709 00 Ostrava, Czech Republic