

Antenna Java Modem GLONASS & Billetooth RFID

2M G LTE H GSM ables C Router C Antenn Bluetooth RFID ≤ RF cables GSM Wi-Fi GPS Rou C Antenna IoT B GLONASS UP Antenna Java Modem GLONAS Mireless RF cables C Ro odem GLONASS ≤ Bluetooth R Router LTE H ⊆ GSM W

# ISM ANTENNA

Antenna ISM Connector Mount G402, 915 MHz, 90°/180°, 2 dBi, RP-SMA(pin f)

AO-A915-G402SRP

SECTRON company offers a wide portfolio of ISM antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.





### BENEFITS

- No cable required
- Compact design

Technology	ISM
Frequency bands	915 MHz
Bandwidth	-
Gain	2 dBi
VSWR	<2.4:1
Impedance	50 Ohm
Directivity	Omnidirectional
Polarization	Linear
Maximum input power	-
Power voltage	-
Dimensions	10 x 108.5 mm
Weight	9.87 g
Operating temperature	-40 +85 °C
Execution	External
Method of attachment	Connector Mount
Cable type	-
The cable length	-
Connector type	SMA-RP(pin f)
Certification	RoHS

## DRAWING

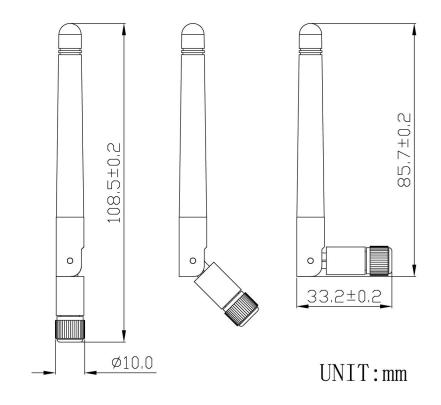


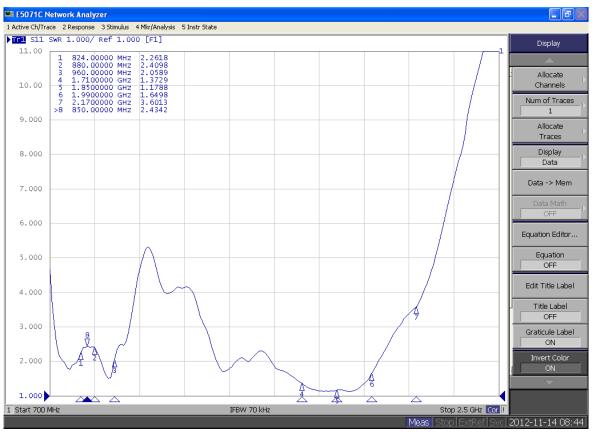



### MEASUREMENT

AO-A915-G402SRP

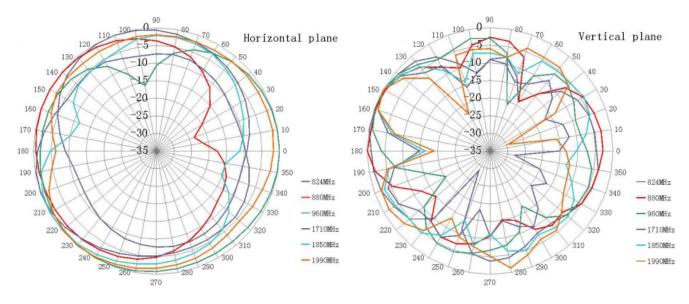

#### **2D RADIATION PATTERN**

Different connector variants or cable lengths are available on request.

### CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12 709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ Tel.: +420 556 621 020