



GNSS/LTE ANTENNA

Antenna MIMO LTE/GNSS, Screw Mount B046LML,
3× SMA(m), RG174, 3 m, IP67

AO-AKOM-B046LML

SECTRON company offers a wide portfolio of LTE/GPS antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.



BENEFITS


- Low VSWR
- IP67
- Optimized radiation pattern

FEATURES

AO-AKOM-B046LML




Technology	2 x LTE/GNSS
Frequency bands	698-960MHz;1710-2690/1575.42 MHz
Bandwidth	-
Gain	2.5/2.0/0 dBi
LNA gain	28 dB
VSWR	<3.0:1/ <3.0:1/ <1.5:1
Impedance	50 Ohm
Directivity	Omnidirectional/Directional
Polarization	Linear/R.H.C.P.
Maximum input power	10 W
Power voltage	3 – 5 V DC
Dimensions	Ø 81.3 x 29.6 mm
Weight	192.82 g
Operating temperature	-45 to +85 °C
Execution	External
Method of attachment	Screw mount
Cable type	3 x RG174/U
The cable length	3 x 3 m
Connector type	3 x SMA(m)
Material	ABS
IP rating	IP67
Certification	RoHS, ISO9001, ISO14001

DRAWING

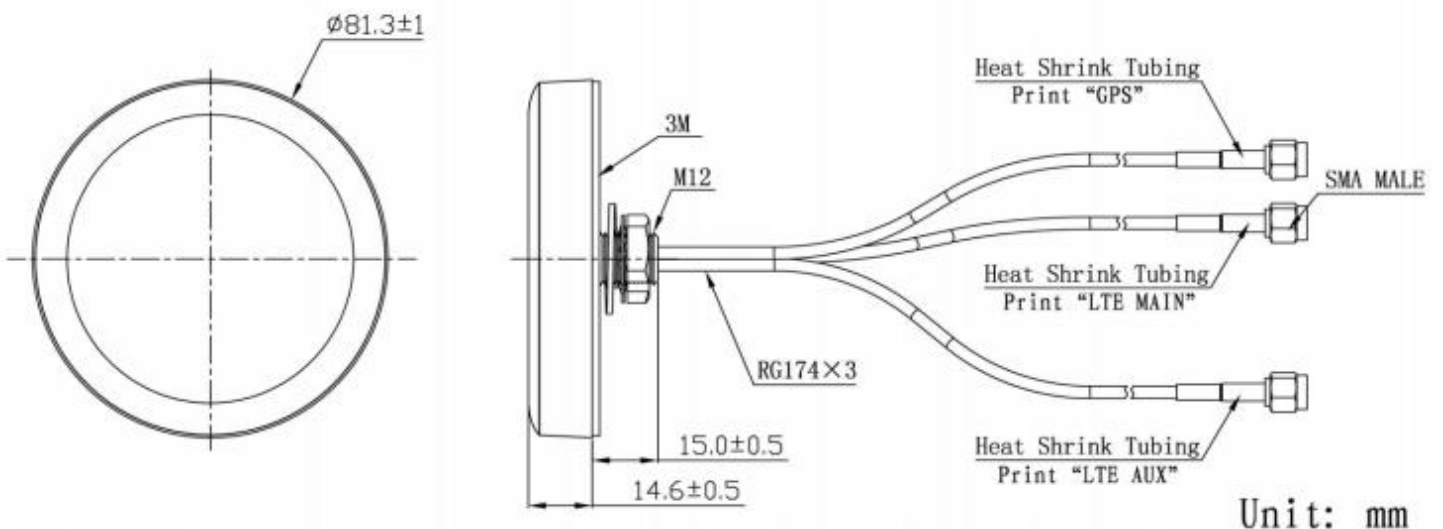


Frequency [MHz]	S_{11} [dB]	VSWR [-]	Gain [dBi]
900	-21.23	1.19	2.0
1800	-16.54	1.35	1.8
2100	-10.16	1.90	2.4
2500	-10.88	1.80	2.3
2700	-10.16	1.90	2.5
1575.42	-13.98	1.50	30.0

SIMULATED GRAFS

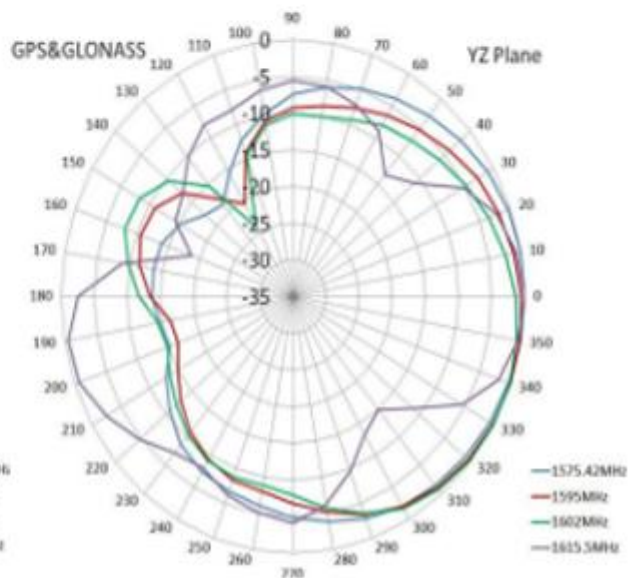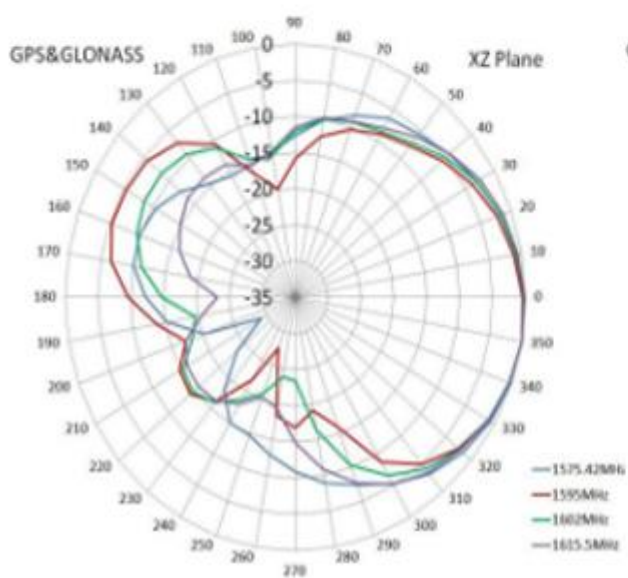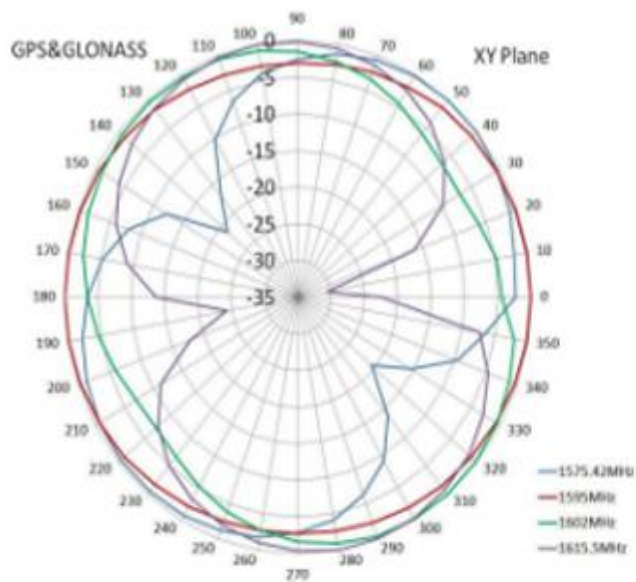


SIMULATED GRAFS


LTE Antenna MAIN

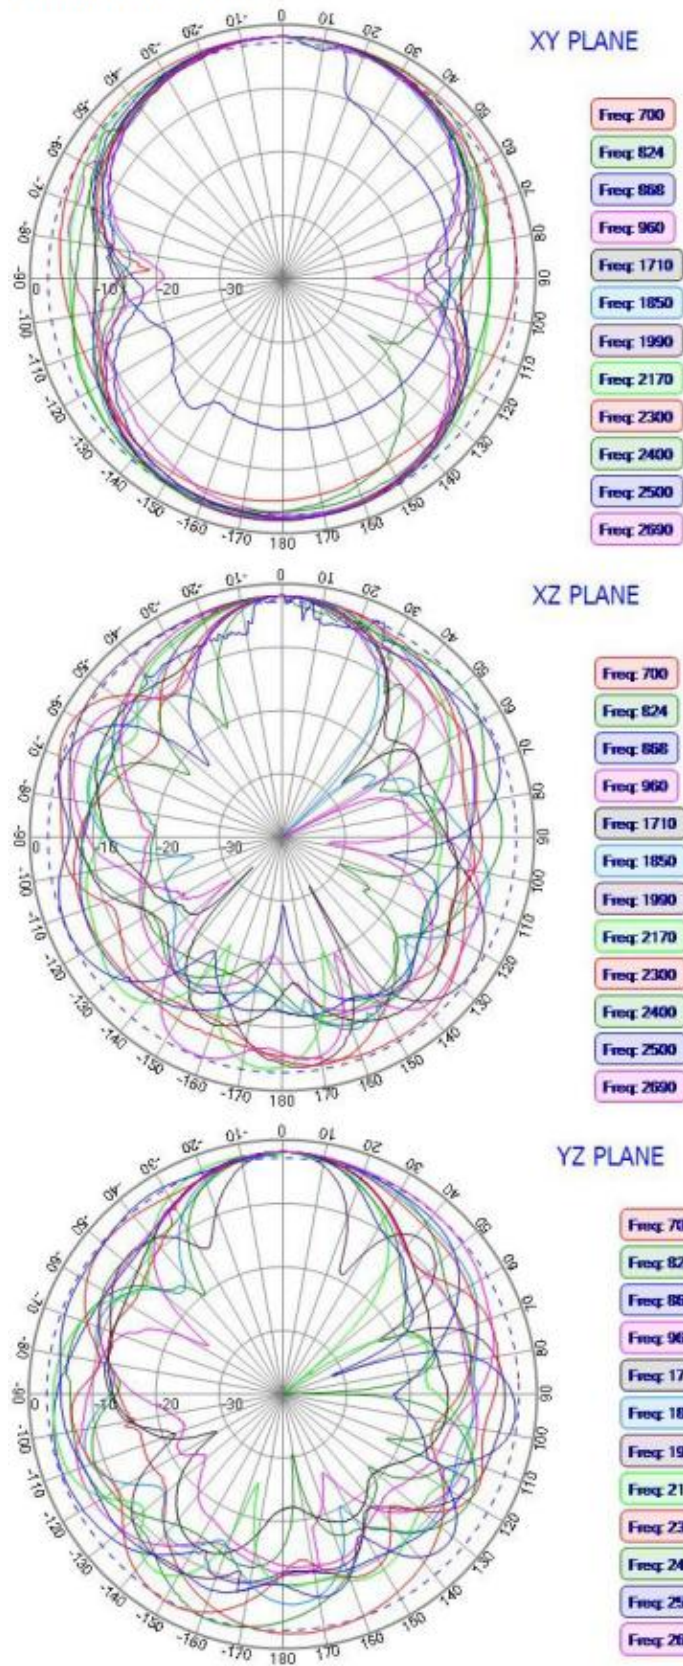

LTE Antenna AUX

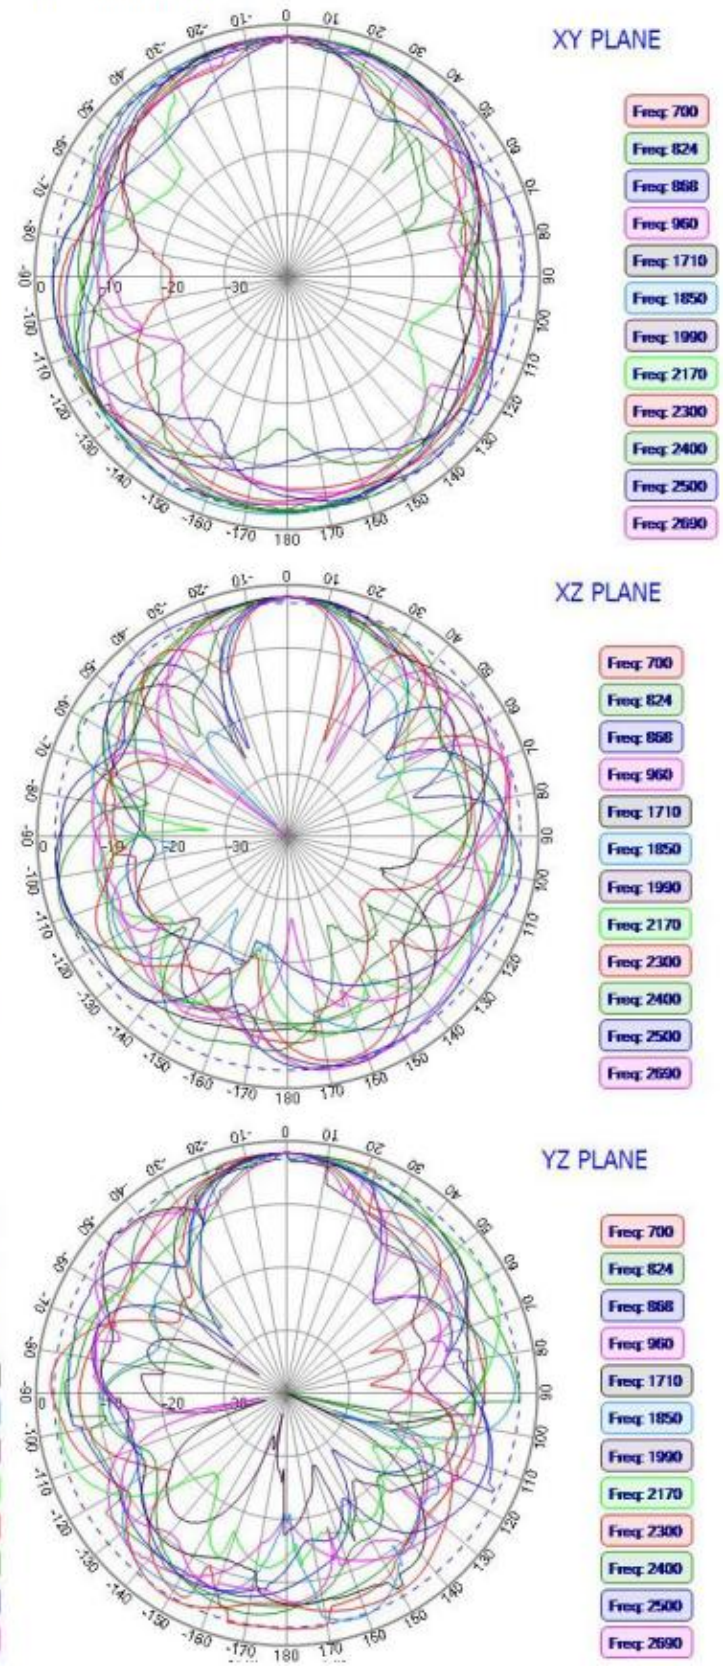

VSWR – Voltage standing wave ratio [-]

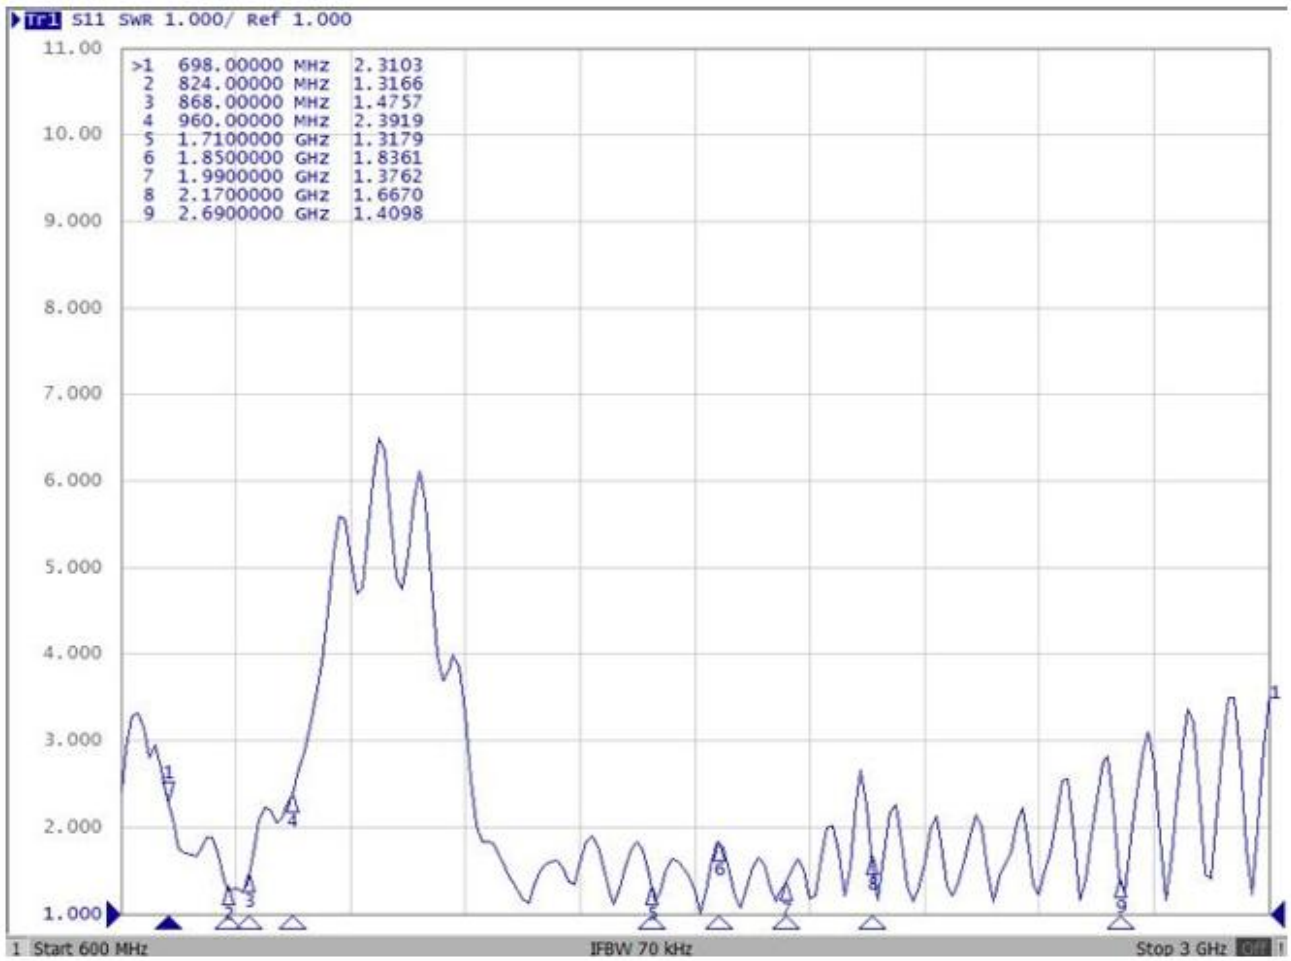

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 020