

# RF CABLE ADAPTOR DATASHEET



## U.FL(f) to FME(m), LP-088, 10 cm AM-88-UFS10



SECTRON company offers a wide portfolio of high-quality handmade cable adaptors in various versions for M2M applications.

SECTRON product portfolio includes brand connectors and coaxial cables in diameters from 0.8 mm to 10 mm suitable for frequencies up to 6 GHz. Using the latest technologies and our experience in the field, we will manufacture and test each RF cable adaptor exactly for your device.


### BENEFITS

- High reliability thanks to precise design
- Low Insertion loss
- Low VSWR

### FEATURES

Frequency range	Up to 3 GHz
Impedance	50 ± 2 Ohm
Maximum VSWR	< 1.3:1
Maximum Insertion Loss	-0.55 dB
Maximum operating voltage	200 V AC/1 min
Cable type	Cable 088 series, Diameter 1.37 mm micro coax
Cable length	0.1 m
Connector type A	FME(m)
Connector type B	U.FL(f)
Operating temperature	-40 °C to +90 °C
Weight	7.78 g
Certification	RoHS

### DRAWING

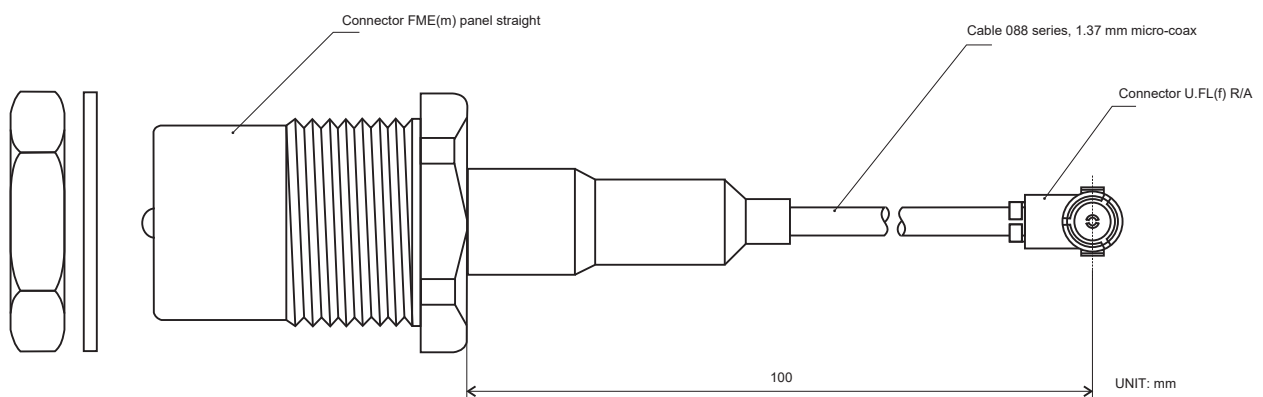


CZ: +420 556 621 030  
INT: +420 556 621 020

CZ: obchod@sectron.cz  
INT: sales@sectron.cz

SECTRON s.r.o.  
Josefa Šavla 12, 709 00 Ostrava, Czech Republic



## CABLE PARAMETERS

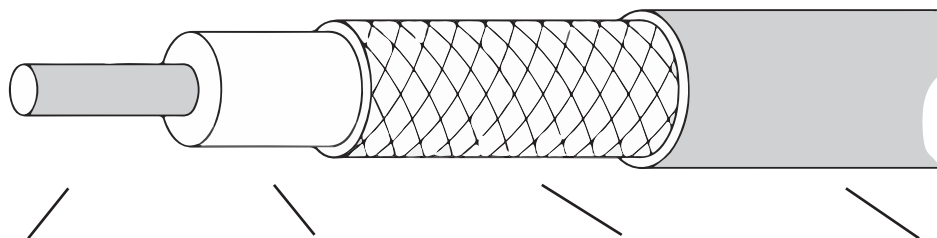


Inner Conductor	Insulation	Braid shield	Jacket
Material: Silver-plated Cu wire	Material: FEP	Material: Tinned Cu wire	Material: FEP
Stranding: 7×0.102 mm		Type braid: 16×0.05 mm	
Outer diameter: 0.31 mm	Outer diameter: 0.9±0.03 mm	Outer diameter: 1.13±0.05 mm	Outer diameter: 1.37±0.1 mm

## ADAPTOR MEASUREMENT

**GRAPH VSWR - VOLTAGE STANDING WAVE RATIO [-]**

VSWR

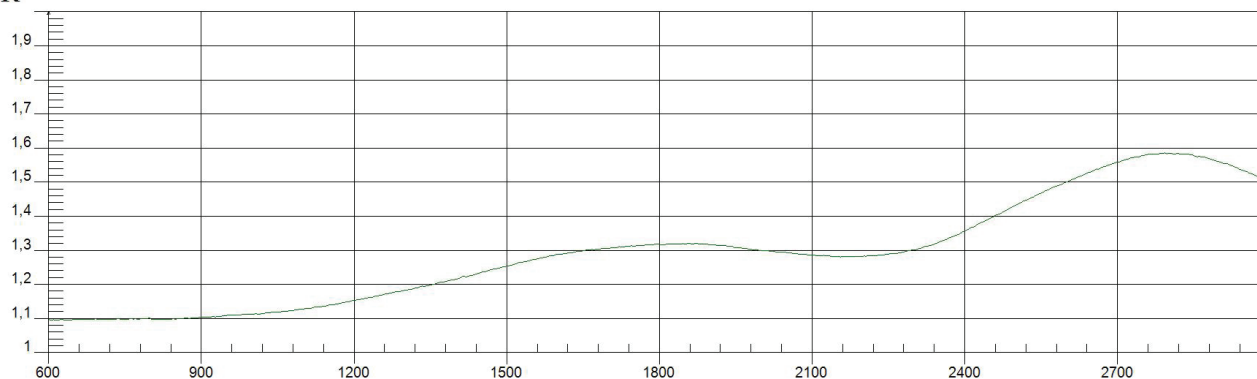

**GRAPH S12 - INSERTION LOSS [dB]**

dB

