

# ISM ANTENNA

Antenna ISM YAGI 100, 868 MHz, 10 dBi, SMA(m), RG58/10m

AO-A868-YASS

SECTRON company offers wide portfolio different antennas with various versions differing in shape, level of gain or attachment manner. SECTRON guarantees compatible connection between antenna and all antenna adaptors produced by SECTRON.


#### **BENEFITS**

- Useful for LoRa or SIGFOX
- High Gain
- Directional greater reach




| Technology            | ISM/LoRa/SIGFOX     |
|-----------------------|---------------------|
| Frequency bands       | 868 MHz             |
| Bandwidth             | -                   |
| Gain                  | 10 dBi              |
| VSWR                  | <2.0:1              |
| Impedance             | 50 Ohm              |
| Directivity           | Directional         |
| Beam angle            | H 30° V 30°         |
| Polarization          | Linear              |
| Maximum input power   | 10W                 |
| Power voltage         | -                   |
| Dimensions            | 540 x 179.8 x 26 mm |
| Weight                | 865 g               |
| Operating temperature | -40 to +85 ° C      |
| Execution             | External            |
| Method of attachment  | Screw Mount         |
| Cable type            | RG58/U              |
| The cable length      | 10 m                |
| Connector type        | SMA(m)              |

### DRAWING

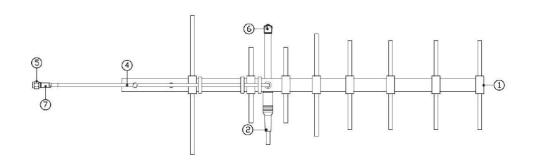


| NO. | NAME             | FINISH         | Q, TY |
|-----|------------------|----------------|-------|
| 01  | Body             | Nickel plating | 01    |
| 02  | Core tube        | Black          | 01    |
| 03  | Screw set        |                | 01    |
| 04  | RG-58A/U Cable   | Black          | 01    |
| 05  | SMA 180°(Male)   | Nickel plating | 02    |
| 06  | Тор сар          | Black          | 01    |
| 07  | Heat-shrink tube | Black          | 01    |
| 08  | Clip wire        | White          | 03    |

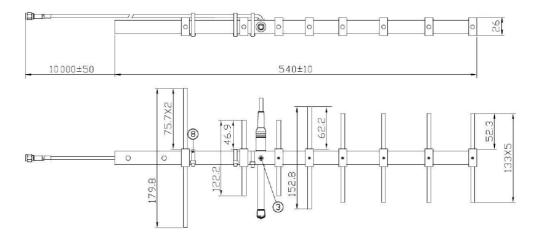


MEASUREMENT AO-A868-YASS

#### **3D Test Photo**

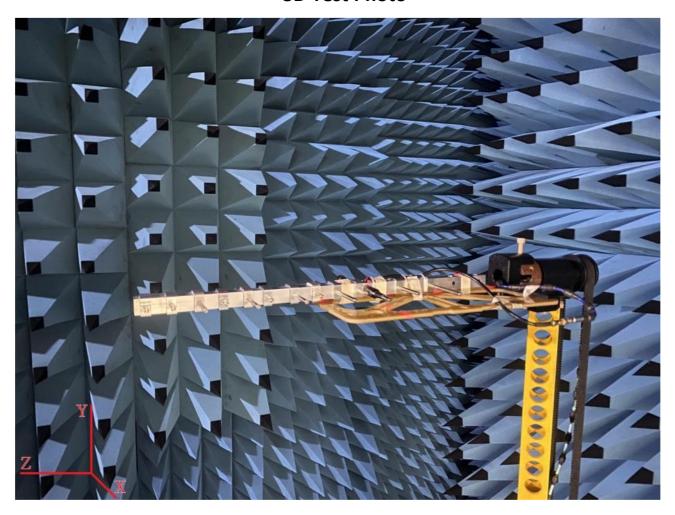


S11 – Return loss [dB]

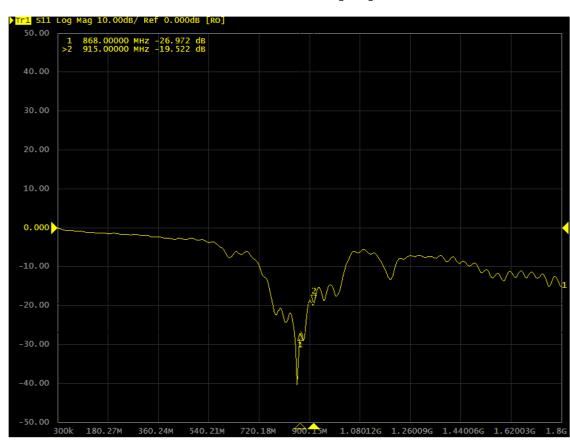


MEASUREMENT AO-A868-YASS

## **VSWR** – Standing wave ratio [-]

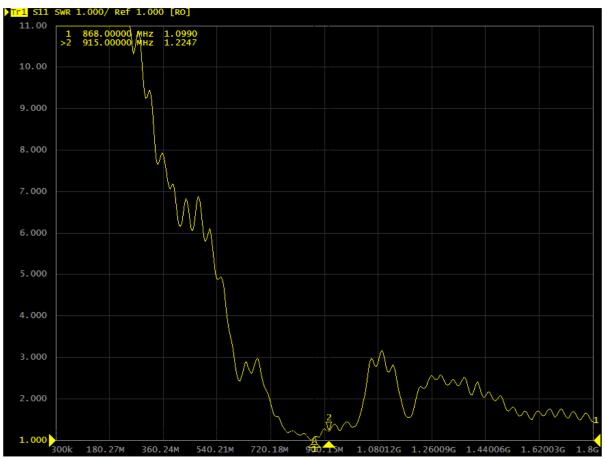

2D - Radiation pattern [-]

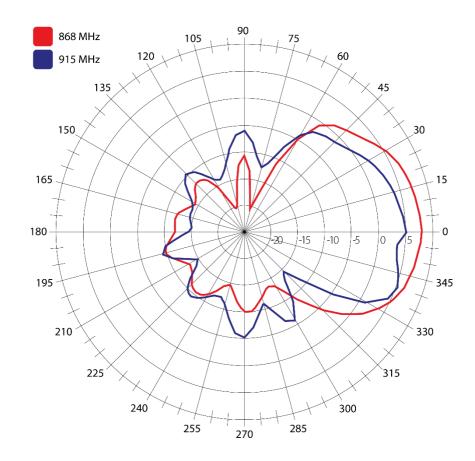

SUMMARY AO-A868-YASS

| Frequency (MHz) | Return Loss (dB) | VSWR | Efficiency (%) | Gain (dBi) |
|-----------------|------------------|------|----------------|------------|
| 868             | -26.97           | 1.09 | 67.61          | 8.06       |
| 915             | -19.52           | 1.22 | 42.46          | 5.11       |

#### CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12 709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ

Tel.: +420 556 621 020