



LTE ANTENNA

Antenna LTE Magnetic 124,
6 dBi, SMA(m), RG174/3m

AO-ALTE-G124S

SECTRON company offers a wide portfolio of GSM/UMTS/LTE antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.


BENEFITS

- Low VSWR
- Easy installation
- High frequency range



Technology	GSM/UMTS/LTE
Frequency bands	700/800/900/1700/1800/1900/2100/2600 MHz
Bandwidth	-
Gain	6 dBi
VSWR	<3.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Vertical
Maximum input power	10 W
Power voltage	-
Dimensions	315 x Ø 29.5 mm
Weight	55.99 g
Operating temperature	-40 to +85 °C
Execution	External
Method of attachment	Magnetic
Cable type	RG174/U
The cable length	3 m
Connector type	SMA (m)
Certification	RoHS, ISO 9001 & ISO 14001
Material	PP PVC 40P


DRAWING

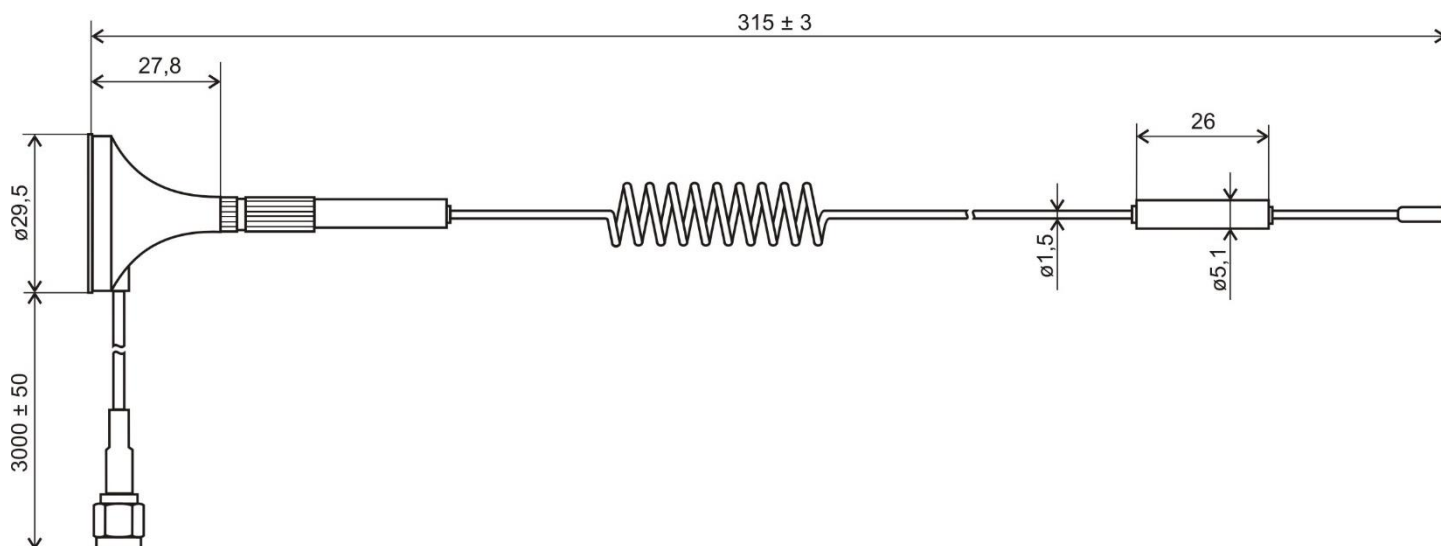

UNIT: mm

VSWR - Standing wave ratio [-]

AO-ALTE-G124S

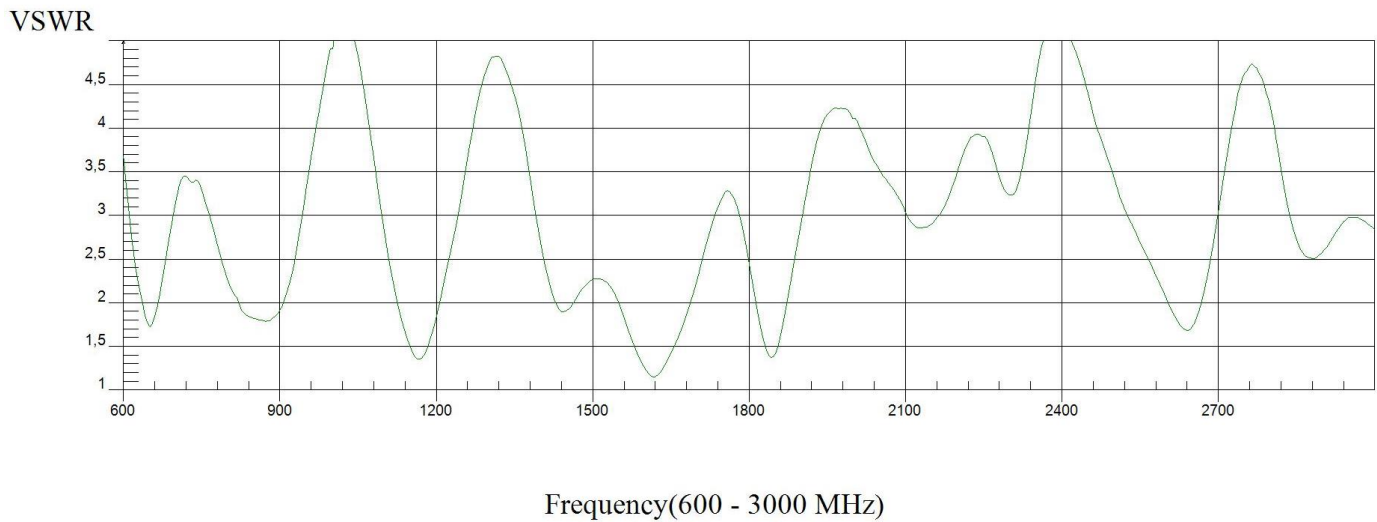

Different connector variants or cable lengths are available on request.