



GSM/UMTS/LTE ANTENNA

Antenna GSM/UMTS/LTE, 3 dBi,
2 x SMA(m), 2x RG174/1m

AO-ALTE-MG3SD

SECTRON company offers a wide portfolio of GSM/UMTS/LTE antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.




BENEFITS

- Low VSWR
- Adjustable angle
- Omnidirectional - suitable for moving devices

Technology	GSM/UMTS/LTE
Frequency bands	700/800/900/1700/1800/1900 MHz 2600/2700 MHz
Bandwidth	-
Gain	3 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	320 x \varnothing 81 mm
Weight	305 g
Operating temperature	-30 to +90 °C
Execution	External
Method of attachment	Magnetic
Cable type	RG174/U
The cable length	2 x 1 m
Connector type	2 x SMA(m)

DRAWING

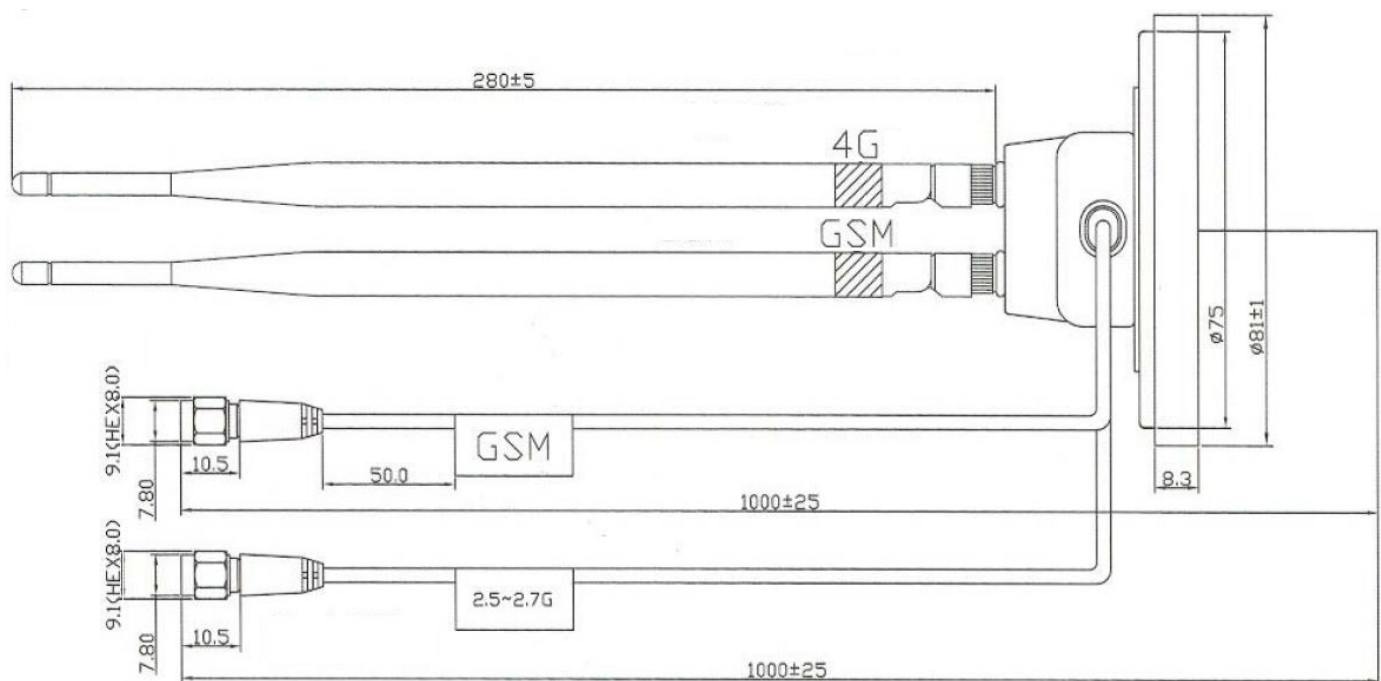

Unit: mm

CONTACTS