



LTE ANTENNA

Antenna LTE Adhesiv 2.5 dBi,
SMA(m), RG174U/3m

AO-ALTE-SA3S

SECTRON company offers a wide portfolio of LTE antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.




BENEFITS

- Low VSWR
- Easy installation
- High frequency range


Technology	LTE
Frequency bands	800/900/1800/2100/2600 MHz
Bandwidth	-
Gain	2.5 dBi
VSWR	<2.0:1
Impedance	50 ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Vertical
Maximum input power	10 W
Power voltage	-
Dimensions	115.5 x 22.2 x 7 mm
Weight	53.72 g
Operating temperature	-20 to +60 °C
Execution	External
Method of attachment	Adhesive
Cable type	RG174/U
The cable length	3 m
Connector type	SMA (m)

DRAWING

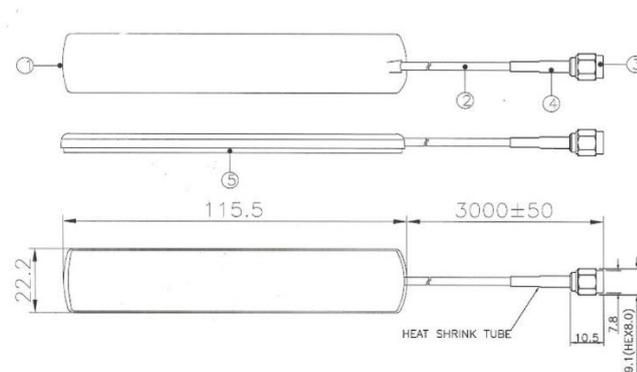


Units: mm


Far-field amplitude of C07+M25-1+Cable-20cm-E.nsi

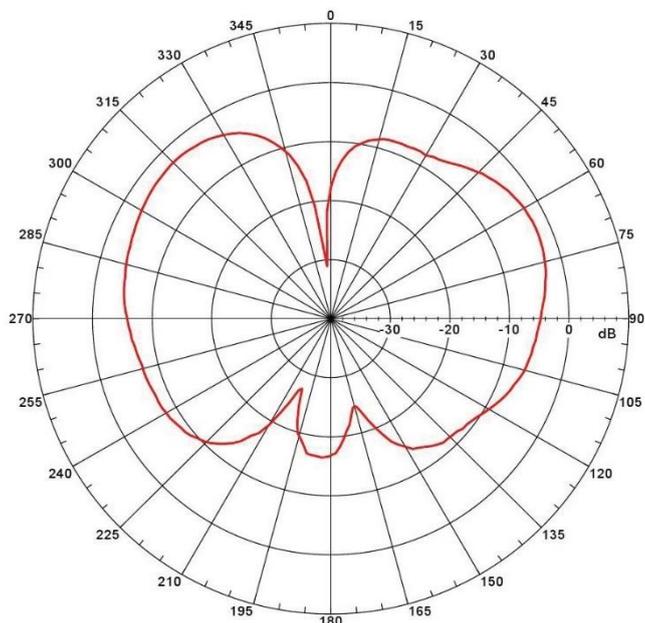


Far-field amplitude of C07+M25-1+Cable-20cm-E.nsi

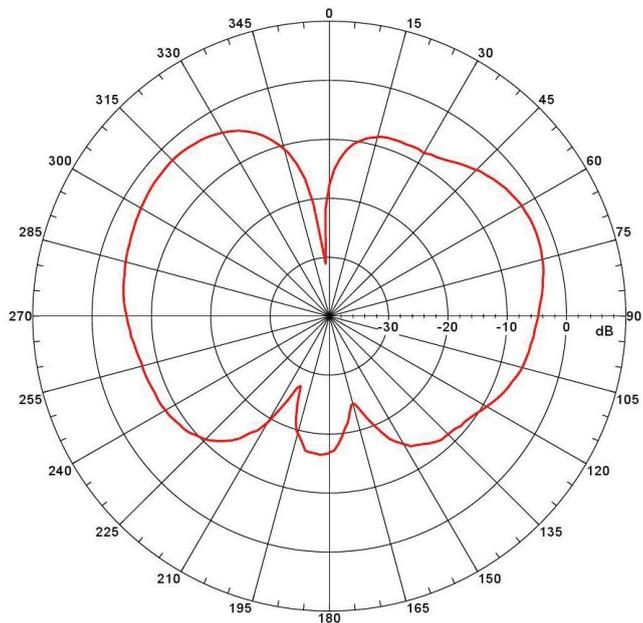


Far-field amplitude of C07+M25-1+Cable-20cm-H.n

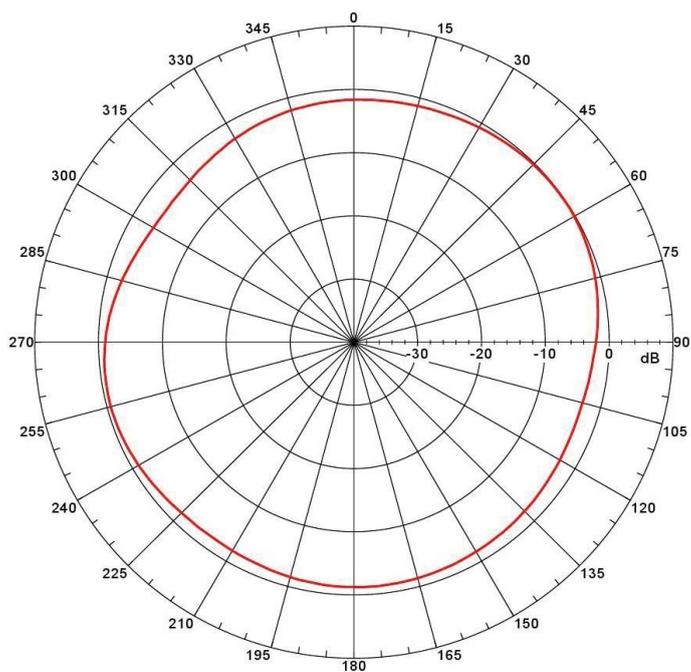


Far-field amplitude of C07+M25-1+Cable-20cm-H.nsi

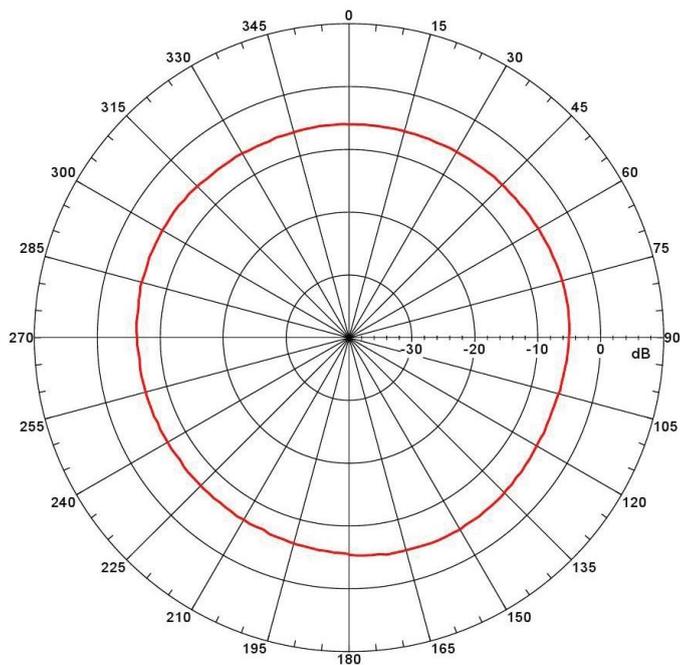


Far-field amplitude of C07+M25-1+Cable-4.5M-E.nsi

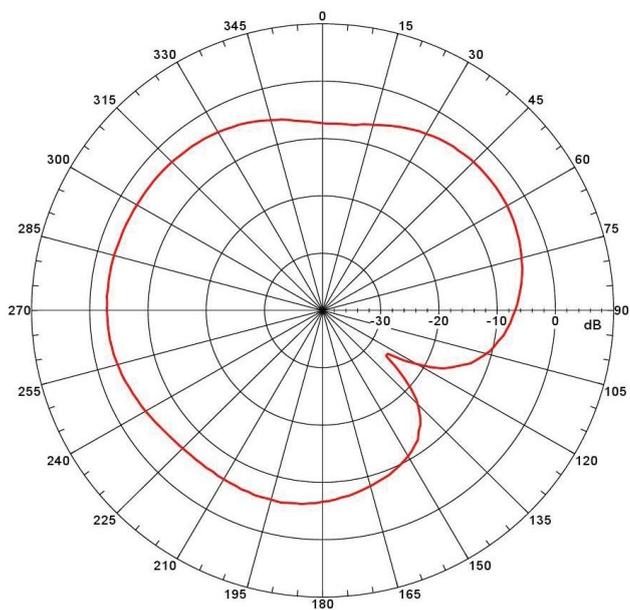


Far-field amplitude of C07+M25-1+Cable-4.5M-E.nsi

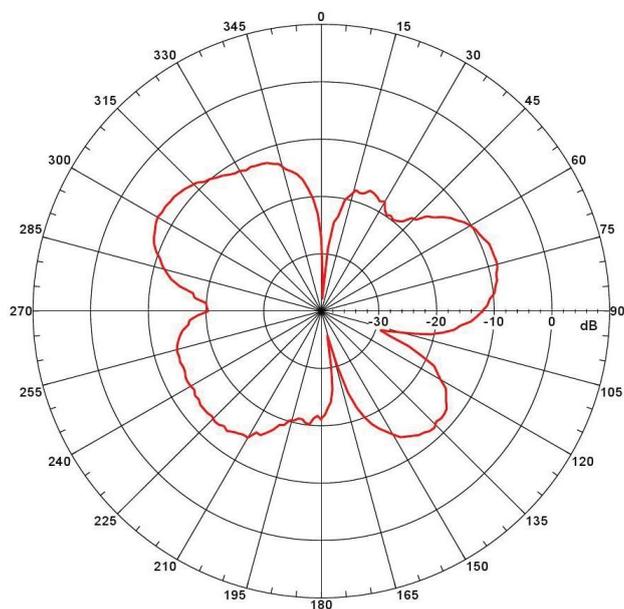

Far-field amplitude of C07+M25-1+Cable-4.5M-H.nsi

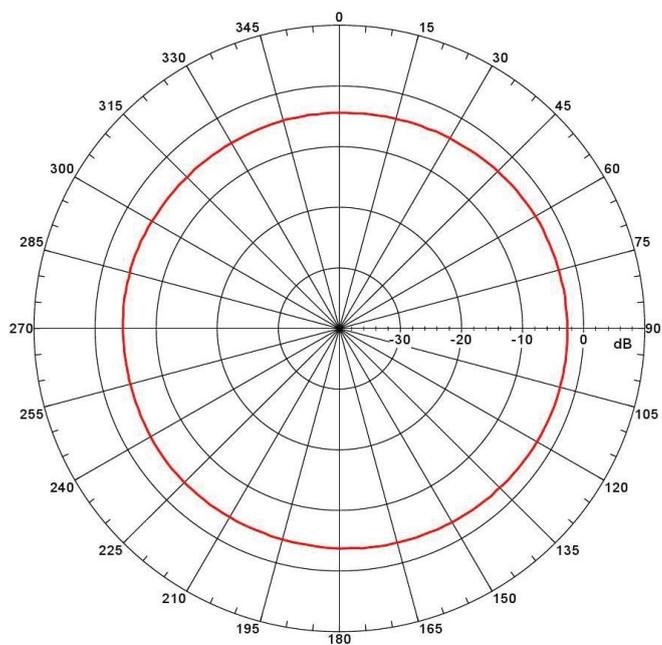

Far-field amplitude of C07+M25-1+Cable-4.5M-H.nsi

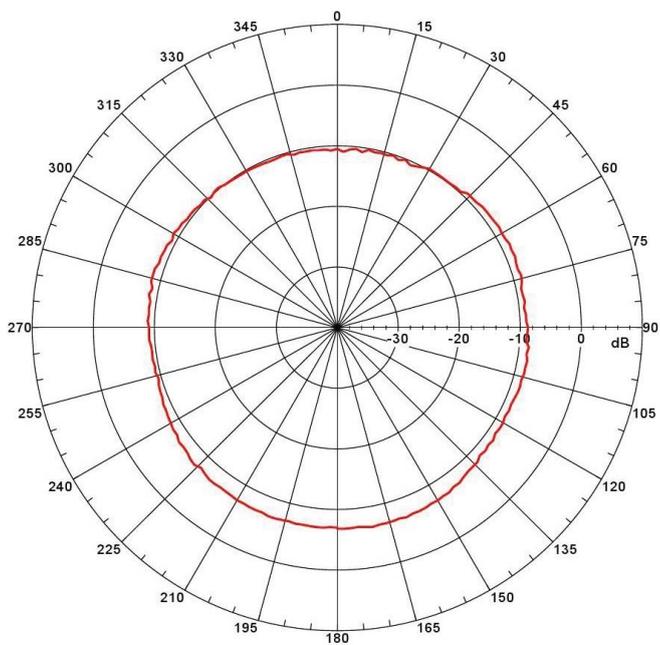

VARIANT	PART NUMBER

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 021