



GSM/UMTS/LTE ANTENNA

Antenna GSM/UMTS/LTE ceiling, SMA(m)

AO-ALTE-W9S

SECTRON company offers a wide portfolio of GSM/UMTS/LTE antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.




BENEFITS



- Low VSWR
- Easy instalation

Technology	GSM/UMTS/LTE
Frequency bands	800/900/1700/1800/1900/2100/2400/2500/2600/2700 MHz
Bandwidth	-
Gain	1-3 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	136 x 55 x 47 mm
Weight	93.39 g
Operating temperature	-20 to +60 °C
Execution	External
Method of attachment	Adhesive
Cable type	RG316/U
The cable length	1.5 m
Connector type	SMA(m)


DRAWING

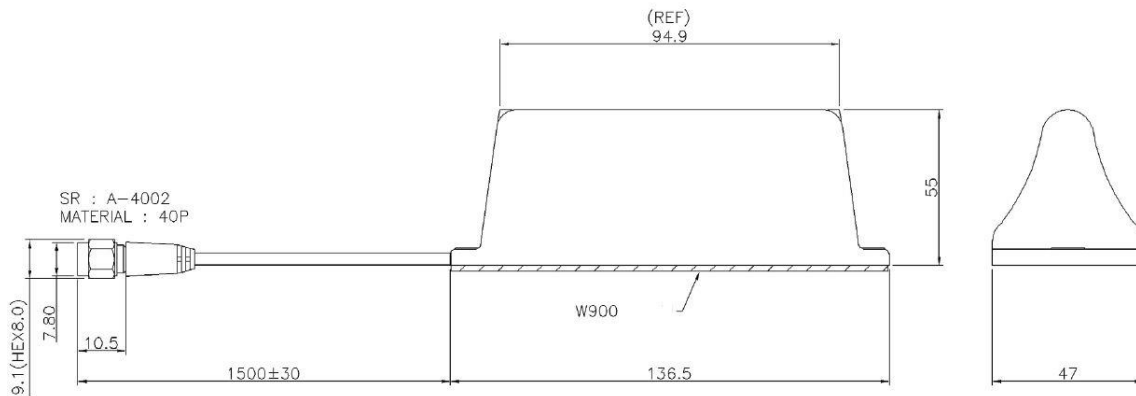


Units: mm

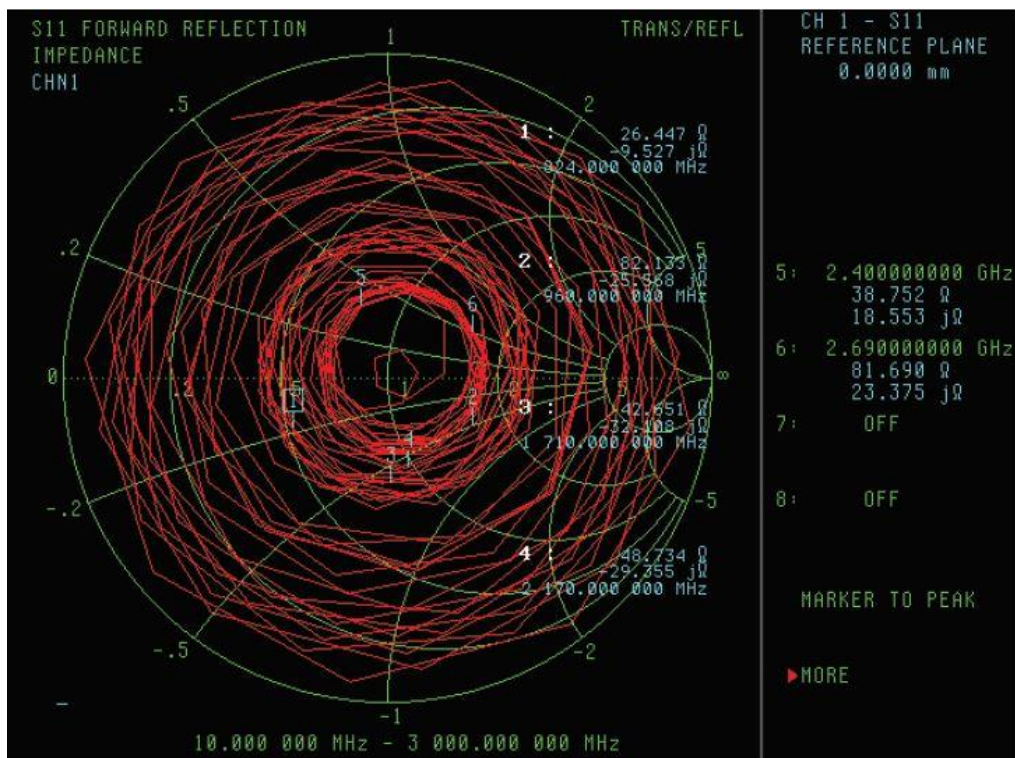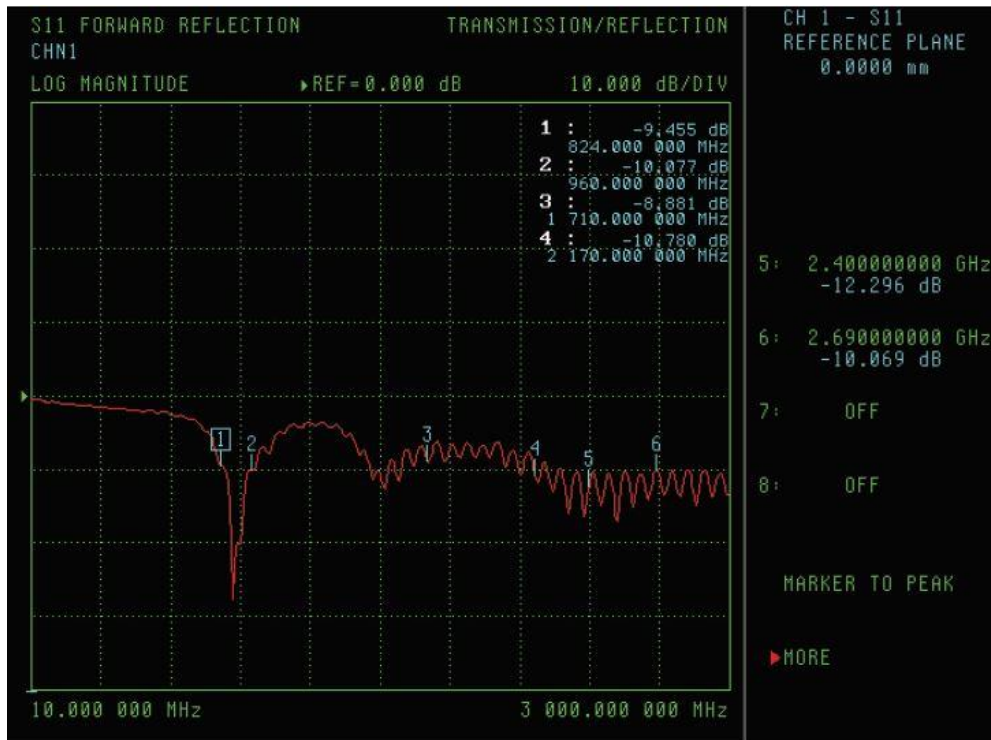


Far-field amplitude of 20120528W900-H01.nsi

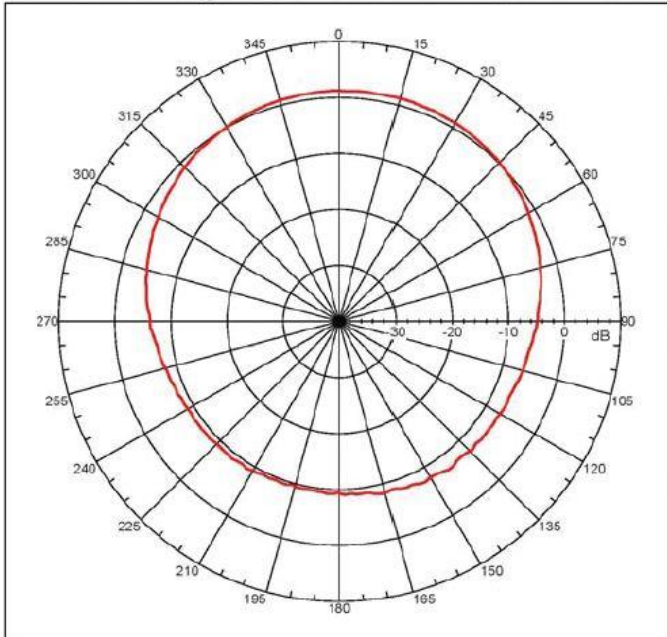


Far-field amplitude of 20120528W900-H01.nsi

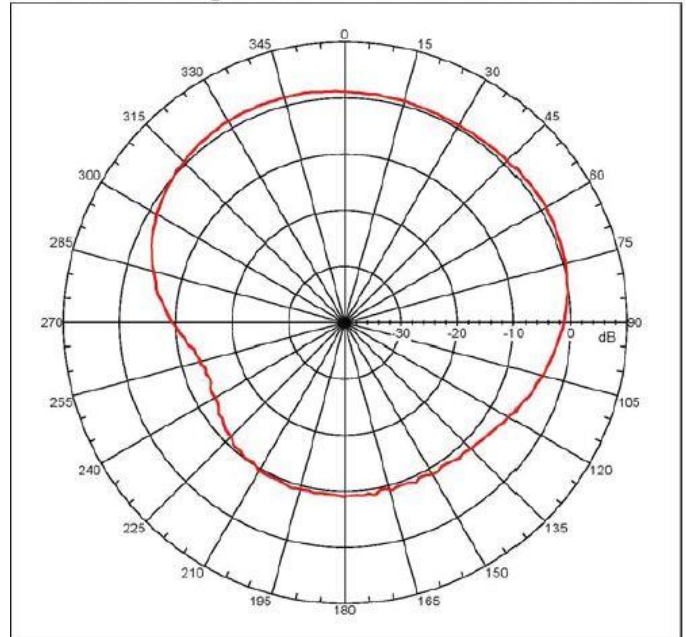

Far-field amplitude of 20120528W900-H01.nsi

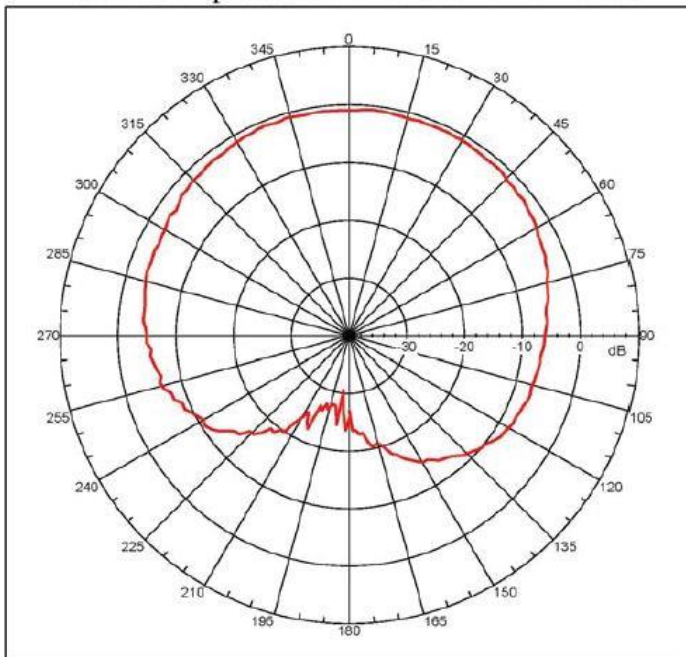

Far-field amplitude of 20120528W900-H01.nsi

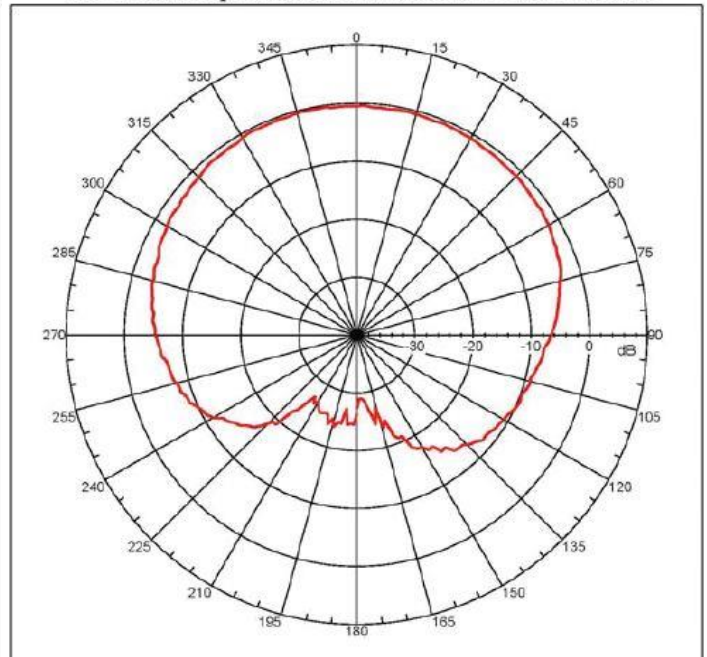

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 021