




WiFi ANTENNA

Antenna WiFi Internal W414,
2.4/5.8 GHz, 3 dBi,
IPEX MHF1(f) R/A, 1.13 Coaxial Cable

AW-A2458G-W414I-30

SECTRON company offers a wide portfolio of WiFi antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.

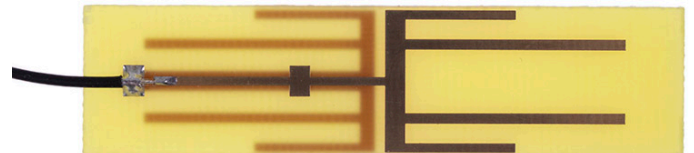

BENEFITS


- Low VSWR
- Easy installation
- Omnidirectional radiation pattern

FEATURES


AW-A2458G-W414I-30

Technology	WiFi
Frequency bands	2400/5000 MHz
Bandwidth	-
Gain	3 dBi
VSWR	<1.2:1/<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	Attached graphs bellow
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	60.0 x 15.0 x 0.6 mm
Weight	2.09g
Operating temperature	-30 to +80 °C
Execution	Internal
Method of attachment	Patch
Cable type	RF 1.13
The cable length	0.3 m
Connector type	IPEX-MHF1 (f) R/A
Certification	RoHS, ISO9001, ISO14001

DRAWING

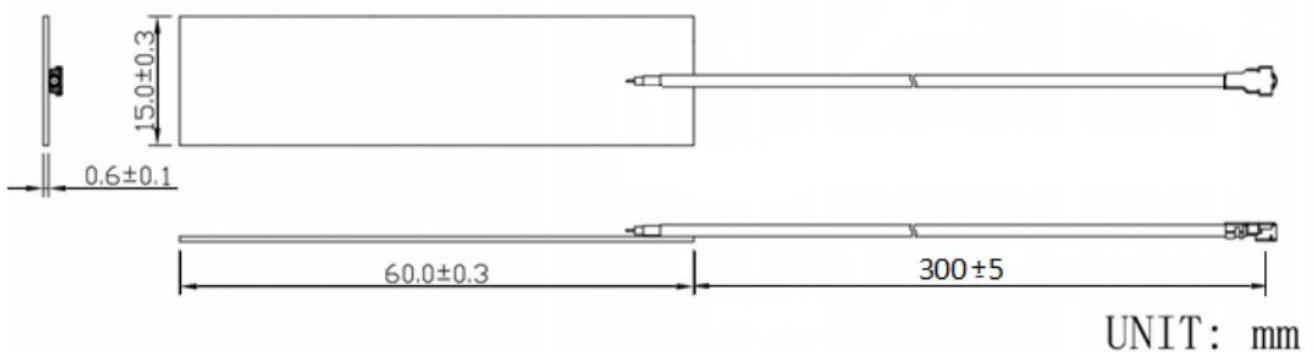


VSWR - Voltage standing wave ratio [-]

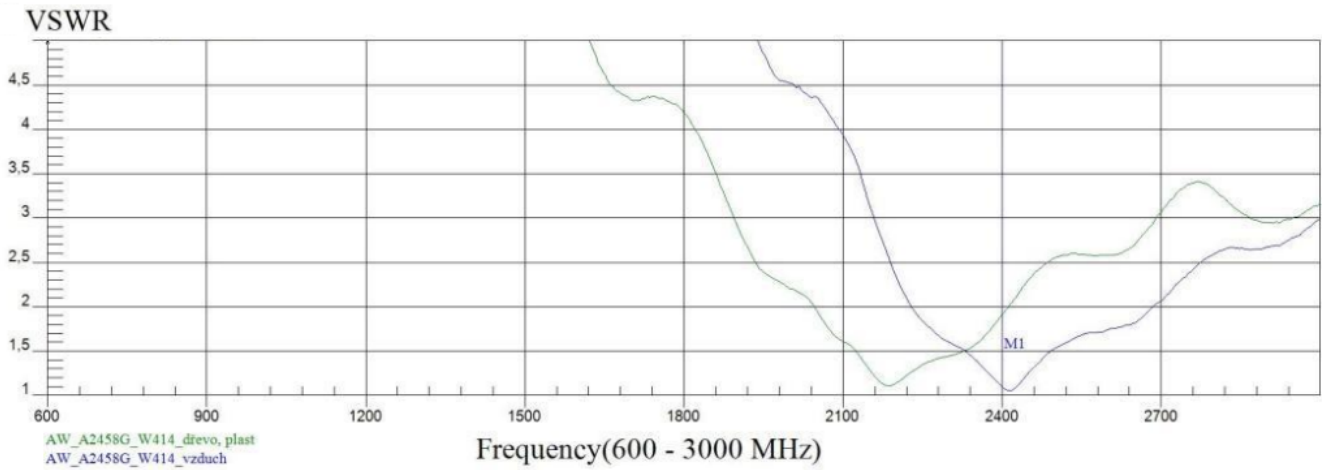

SIMULATED GRAPHS

RADIATION PATTERN

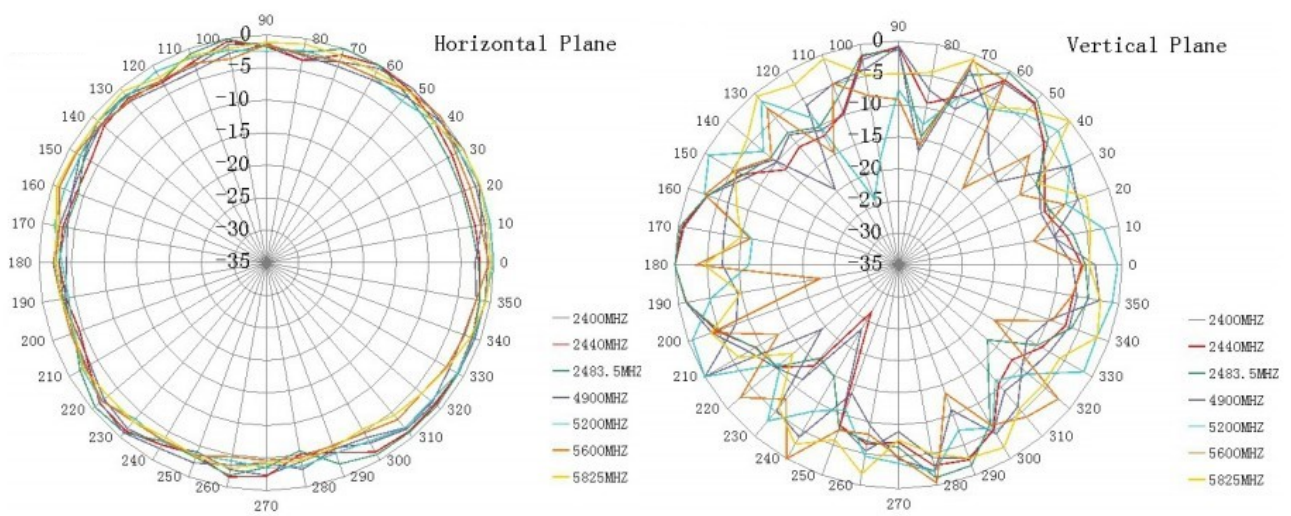

SUMMARY

AW-A2458G-W414I-30

Frequency [MHz]	S_{11} [dB]	VSWR [-]
2400	-20.82	1.2
5000	-9.54	2.0

VARIANTS

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 020