



M-Crown (Max) Tag


FEATURES

- M-Crown (Max) tag operates effectively with read range of over 15m when attached to metal.
- Rugged construction for high durability.
- Can be attached by screws with the help of two compression limiters.
- Can be attached with pop-nail.
- Can also be provided with Adhesive tape for easy attachment.

APPLICATIONS


- M-Crown (Max) tag can be effectively used in asset tracking, ware house management, containers and railway coaches identification.
- Factory automation, automotive & security purpose.

Chip Type:	Alien Higgs 3 EPC Class 1 Gen 2 and ISO 18000-63	
	EPC 96 bit extendable up to 480 bits	
	User Memory 512 bit	
	Data retention of 50 years	
	Write endurance 100,000 cycles	
Mechanical:	Dimension	150 x 25 x 12 mm
	Material	ABS
	Colour	White
	Weight	31 g
Electrical:	Operating Frequency	865-868MHz , ETSI Frequency
	Operating mode	Passive (battery-less transponder)
Ingress Protection:	IP67	
Thermal:	Storage Temp.	-40°C to +85°C
	Operating Temp.	-40°C to +85°C
Part Number:	615V1	
Options:	Available with:	
	Other IC type on request	
	Other plastic material and colours e.g. PC	
	Adhesive backing for easy mounting	

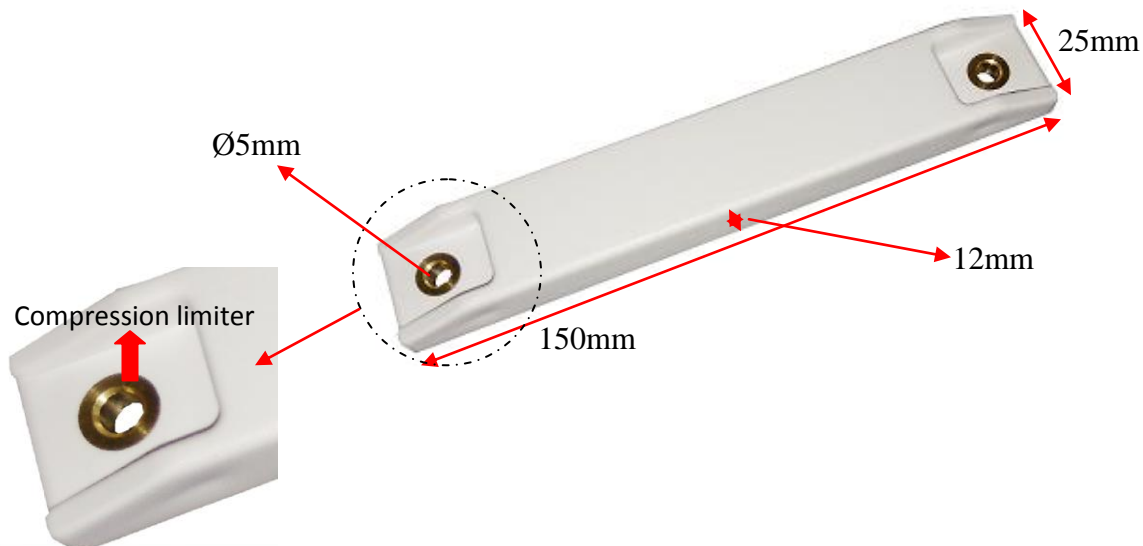

Tag Placement

- ✚ M-Crown (Max) is polarized perpendicular to length of tag.




- ✚ Place the tag in such a way that most of its bottom area comes in direct contact with metal.
- ✚ Ensure that there is no hindrance between the tag and the reader antenna.
- ✚ Reader antenna should be parallel to the tag length as shown in below figure:

Correct way




Antenna

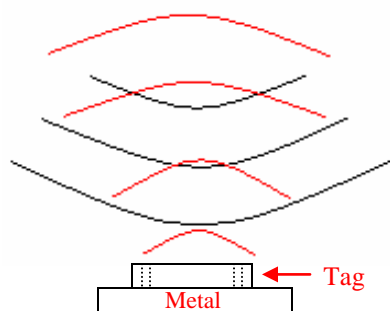

Wrong way




Antenna

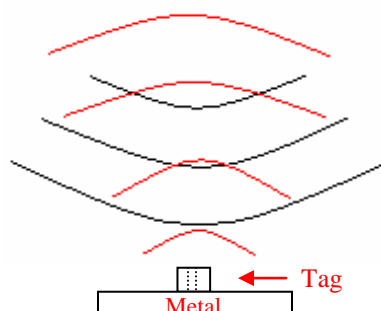

- ✚ Tag can be attached either through screw M4/M5 and adhesive tape.
- ✚ The distance between hole to hole is 126mm.



Frequency v/s Read Range Graph

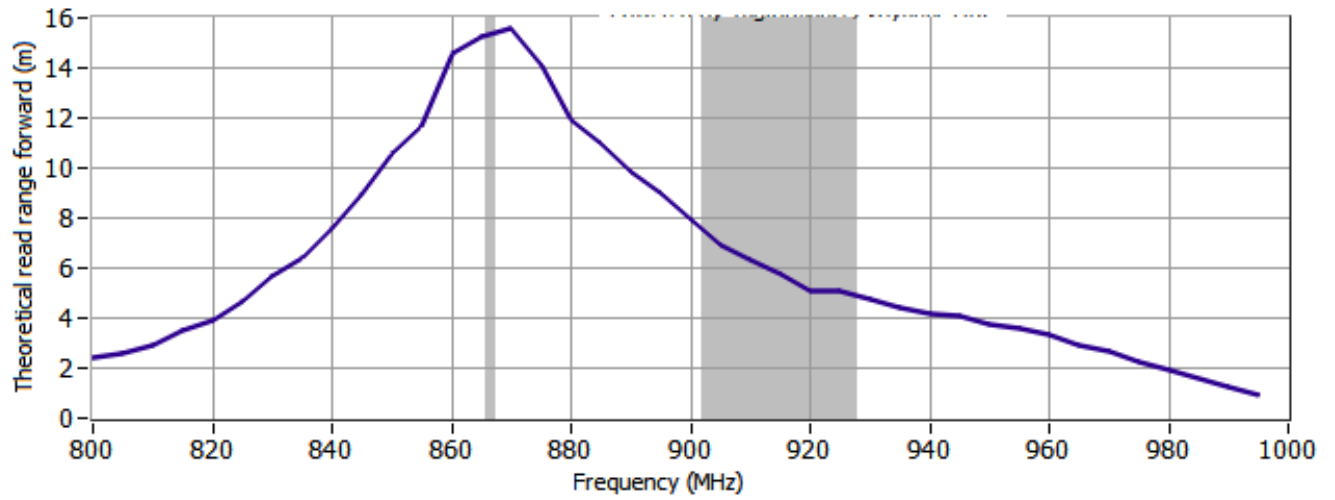

Angular Sensitivity

M-Crown (Max) Tag Angular Sensitivity

(Relative Read Range vs. Orientation)

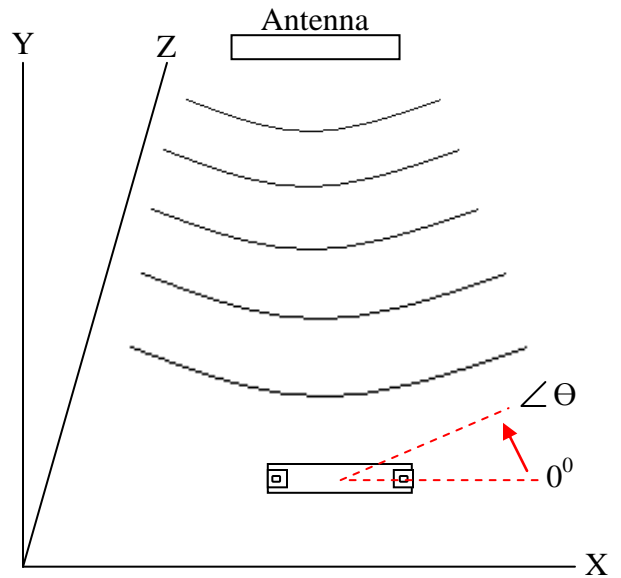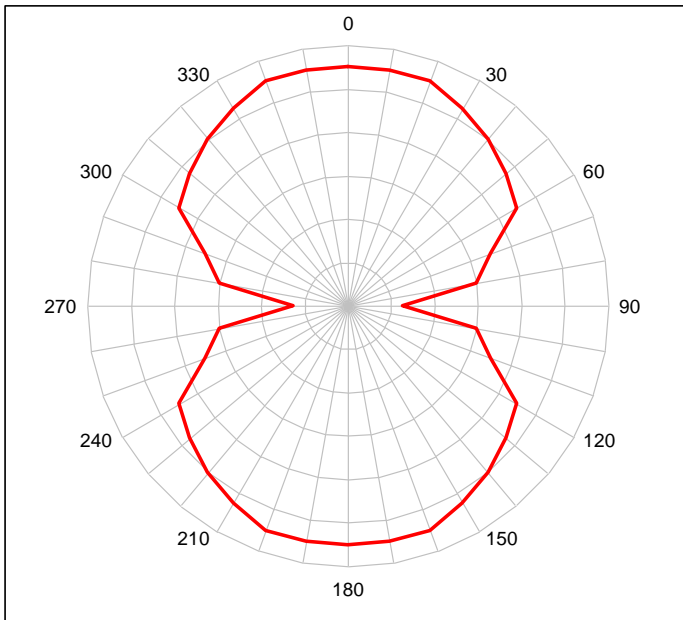

Tag is rotated in the X-Y plane about the z axis