



GSM/GPS ANTENNA

Antenna GSM/GPS Adhesiv PUK,
GSM/SMA-RP(f), GPS/SMA(m),
RG174/5m

AO-AKOM-30SSRP

SECTRON company offers a wide portfolio of GSM/GPS antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.




BENEFITS

- Low VSWR
- Optimized high frequency

Technology	GSM/GPS
Frequency bands	900/1800/1575.42 Mhz
Bandwidth	-
Gain	0 - 30 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H-360°, V-30°
Polarization	Vertical, R.H.C.P
Maximum input power	10 W
Power voltage	-
Dimensions	50.4 x 17 mm
Weight	166.54 g
Operating temperature	-30 to +90 °C
Execution	External
Method of attachment	Adhesive
Cable type	2 x RG174
The cable length	5 m
Connector type	SMA-RP(f)/SMA(m)

DRAWING

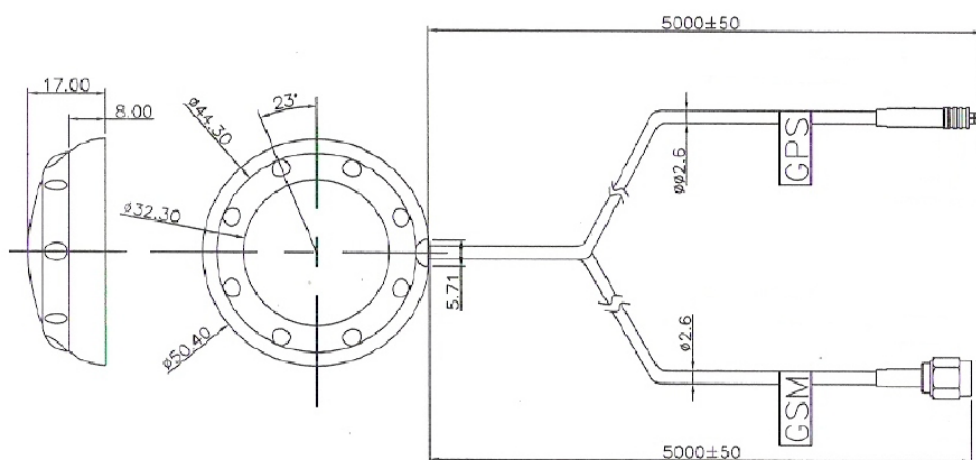

Units: mm

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 021